



## GENERAL CHARACTERISTICS


Temperature transmitter with PT100 sensor and high response speed due to the mechanical dimensioning of the probe. The resistive value determined by the temperature variation is electronically converted into a linear 4-20 mA signal proportional to the temperature itself. The transmitter is a two-wire technology. The body where the connector is fixed can be rotated over 360°.

- 2-wires technology.
- Compact design.
- High sensitivity probe.
- Fast response time.
- 360° swivel connector.
- Degree of protection IP65.




## TECHNICAL DATA

Tab.1

Description	Characteristics		Code		
Measuring range	0 – 100 °C		<b>100</b>		
	0 – 250 °C	With spacer	<b>250</b>	On request	
	< 0 °C		<b>&lt; 0</b>	On request	
Sensing element	PT100		-		
Accuracy	±1% FS		-		
Response time	5 sec. 0 – 80 °C		-		
Power supply	10 – 30 Vdc ± 10%		-		
Current	< 4 mA		-		
Output signal	4 – 20 mA		-		
Maximum load	700 Ω a 24 V		-		
	100 Ω a 10V – 1 KΩ a 30V		-		
Max. pressure	25 Bar		-		
Max. temperature	80 °C		-		
Max. temperature	250°C	With spacer	<b>ETH</b>	On request	
Electrical output	DIN 43650A plug	IP65	<b>B</b>		
	M12x1– 4 poles connector	IP67	<b>S</b>	On request	
Connector body material	Nickel plated brass		-		
Process connection	1/2 " Gas-M	UNI 228/1	<b>015</b>		
Process connection and probe material	Stainless steel AISI-316		<b>K</b>		
Probe length - mm.	<b>050</b>	<b>100</b>	<b>150</b>	<b>200</b>	◀

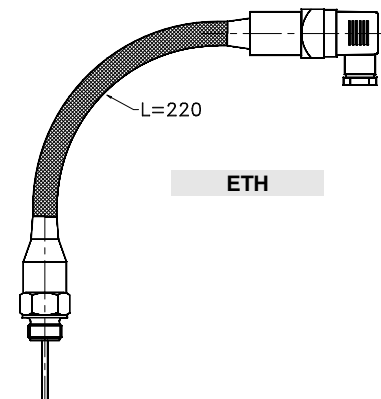

## WIRING AND DIMENSIONS mm.

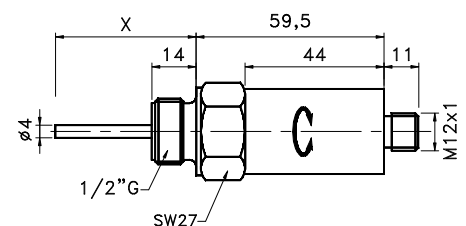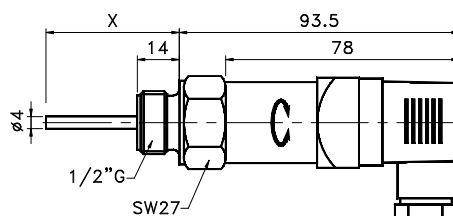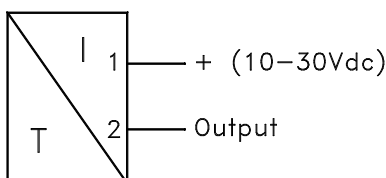

## NOMENCLATURE

ETS	100	K	015	S	050
•					
	•				
		•			
			•		
				•	
					•

Name - Type
Tab.1 Measuring range
Tab.1 Process connection and probe material
Tab.1 Process connection dimension and thread
Tab.1 Electrical output
Tab.1 Probe length L mm